

MAHARASHTRA METRO RAIL CORPORATION LIMITED
Pune Metro Rail Project

Date: 30-Aug-2019


CORRIGENDUM – II

Tender No.: P1US-01/2019 dated 14 Aug 2019

Name of Work: - Modification Of 110 KV Railway Transmission Line at Khadki by Laying 132 KV Underground Cable.

Ref.: Further to Tender Documents dated 14 Aug 2019, Corrigendum I dated 23 Aug 2019

1. The Reply of Pre-Bid Query is attached as Corrigendum –II
2. Typical Trench Cross sectional view -Annexure I to Corrigendum II
3. Extension of bid submission date and opening date -Annexure II to Corrigendum II


30.8.2019
DGM(System)/Procurement
Maha-Metro, PMRP

Reply to Pre-Bid Queries


Name of work:- **Modification of 110 KV Railway Transmission Line at Khadki by laying 132 KV Underground Cable.**
 Tender No. PIUS-01/2019

Sr.No.	Cl.No.& Section or ref.	Existing Clause / Description	Query / Request Raised by Bidder	Reply to queries raised by Bidder
1	SECTION-8, Bill Of Quantities, Sr. No. 1	Supply of 132KV, 1CX500 sq.mm.Copper, XLPE, armoured cable as per MSETCL specification	We intend to offer 132 kV 1CX500 sqmm Copper, XLPE cable with corrugated Al metallic sheath as per MSETCL specification. Please confirm.	Please refer Corrigendum I issued on dated 23-08-2019.
2	SECTION-8, Bill Of Quantities, Sr. No. 6	Supply of sheath bonding aluminium cable 1CX300 sq.mm	Short circuit rating of 40 KA for 3 Sec is specified in MSETCL specification. Cable size of 300 sqmm Aluminium is not suitable to take care of mentioned short circuit rating so we recommend 400 sqmm copper cable for sheath bonding purpose	Sheath Bonding Cable of size 300 Sq.mm Copper is to be used. Please refer Corrigendum I issued on dated 23-08-2019.
3	SECTION-7 SCOPE OF WORK & SPECIFICATION 16. Detail Scope of work is as per work description of BOQ items (Section-8) is described below.	3. Cable laying as per attached cross section complete in all respect including providing route marker throughout the length of cable route as per standard method of MSETCL 11. Excavation of cable trench in hard rock, including getting out the excavated soil and disposal of excavated soil, providing sand, back filling with excavated material, ramming as per attached cross section	Trench cross sectional drawing not found in the documents. Request to pls provide the same.	Refer Annexure I
4		Payment Terms	Payment terms are not clearly mentioned in the tender document. Please provide the same.	Payment terms are detailed in Clause No. 5.54 of Section 5. Payment will be made progressively as a running account bill for the completed and accepted works subject to certification of Engineer..
5	NOTICE INVITING BID (NIT)	Date & Time of submission of Bid : Online submission up till 16.00 Hrs. on 03.09.2019 Maha-Metro 's E-Tender Portal.	Requesting to kindly extend the tender submission date by 3 weeks from the current due date	Refer Annexure II



Modification of 110 KV Railway line by laying 132 KV Underground cable at Khadki

TYPICAL TRENCH CROSS SECTIONAL VIEW (FOR 2 CKT.)

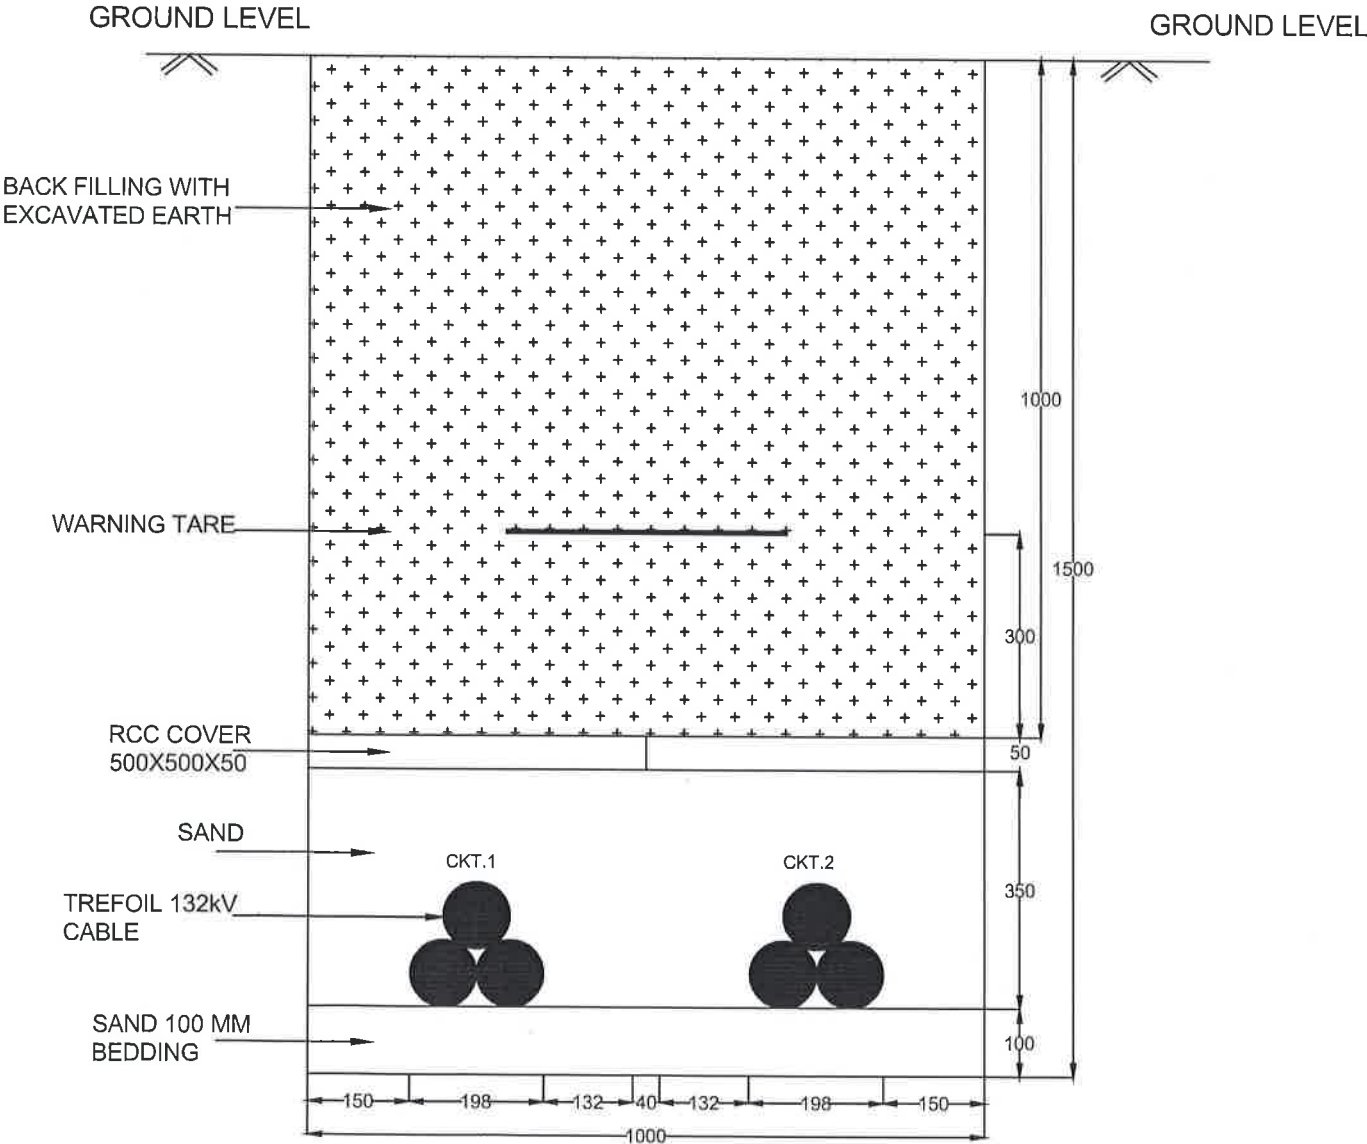

Handwritten signature

Annexure-II

S. No.	Activity	As Per NIT	Revised dates
1	Last date of submission of bids	Upto 16.00 hrs on 03.09.2019	Upto 16.00 hrs on 11.09.2019
2	Date of opening of bids	On 03.09.2019 at 16.30 hrs	On 11.09.2019 at 16.30 hrs

